

PN 10/16 - DN 40...300

KAT-A 1544



- EN12334
- EN558 1 48(DIN 3202 F6)
- 1092-2 (100%)
- G3/4"

- EN-JS 1030 (GGG-40)
- EN-JS 1030 (GGG-40)
- EN-JS 1030 (GGG-40)
- EPDM
- 2(DIN EN ISO 3506)

- EN12266 (DIN 3230 μ 4)
- W270


- GSK
- G 3/4" (μ)
- μ

- 1544

12266

DN	PN	[bar]	μ [°C]
40...300	16	16	50
200...300	10	10	50

μ μ μ [bar]	μ μ μ [bar]
24	17.6
15	11

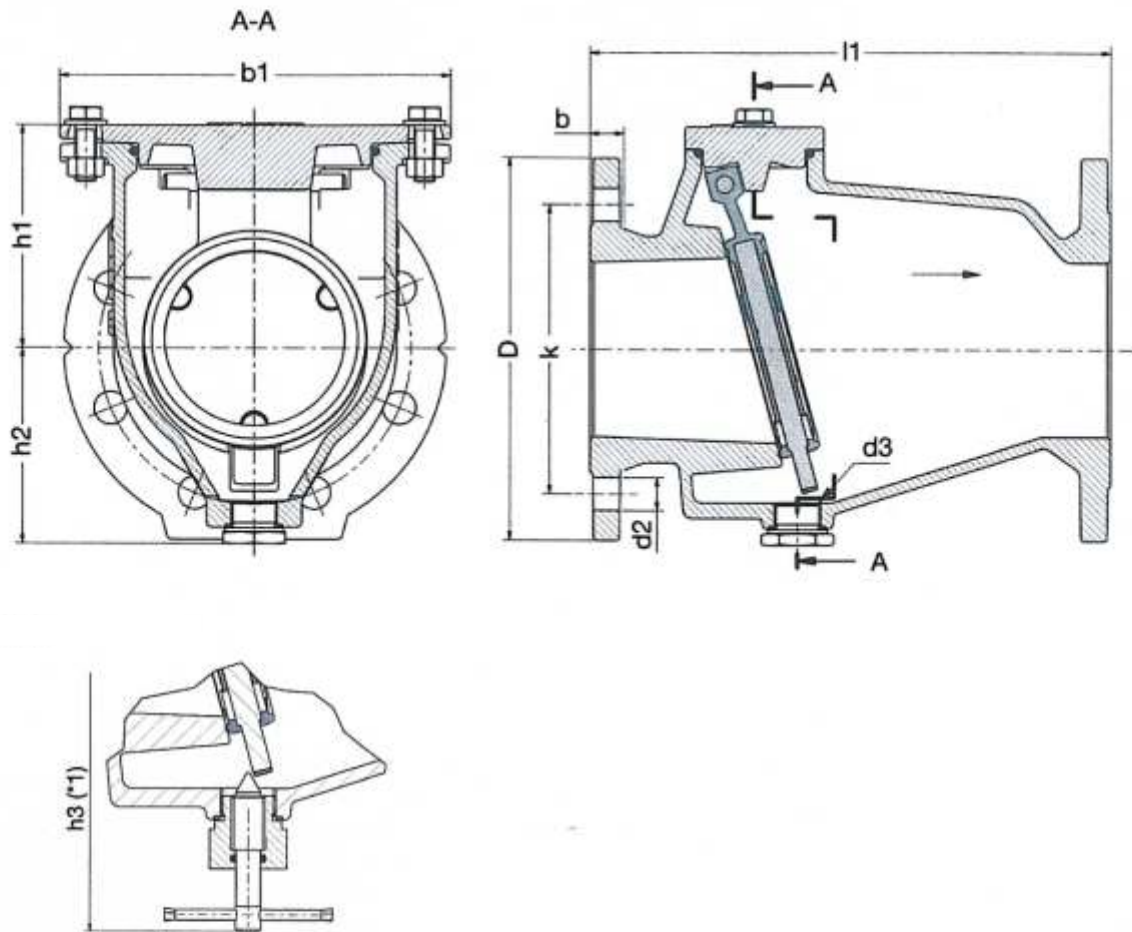

*1: μ μ
 μ μ

- DN 40...100: 1,5 bar -
- DN 125...200: 0,75 bar -
- DN 250...300: 0,25 bar -

PN 16


DN		40	50	65	80	100	125	150	200	250	300
D	[mm]	150	165	185	200	220	250	285	340	400	455
b	[mm]	19	19	19	19	19	19	19	20	22	24.5
b1	[mm]	145	160	185	200	225	310	340	400	490	550
d2	[mm]	19	19	19	19	19	19	23	23	28	28
h1	[mm]	90	95	115	125	138	173	193	237	291	336
h2	[mm]	75	82	90	100	113	138	148	185	210	235
h3	[mm]	115	120	130	140	152	178	185	225	250	275
k	[mm]	110	125	145	160	180	210	240	295	355	410
l1	[mm]	180	200	240	260	300	350	400	500	600	700
		4	4	4	8	8	8	8	12	12	12
d3	(inch)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
	[kg]	8.00	10.00	13.50	16.00	21.00	35.00	46.00	81.00	130.50	175.50
	(m3)	0.005	0.006	0.010	0.015	0.030	0.040	0.050	0.085	0.130	0.190

PN 10

DN		200	250	300
D	[mm]	340	400	455
b	[mm]	20	22	24.5
b1	[mm]	400	490	550
d2	[mm]	23	23	23
h1	[mm]	237	291	336
h2	[mm]	185	210	235
h3	[mm]	225	250	275
k	[mm]	295	350	400
l1	[mm]	500	600	700
		8	12	12
d3	(inch)	3/4"	3/4"	3/4"
	[kg]	81.00	130.50	175.50
	(m3)	0.085	0.130	0.190

VAG

RETO-STOP

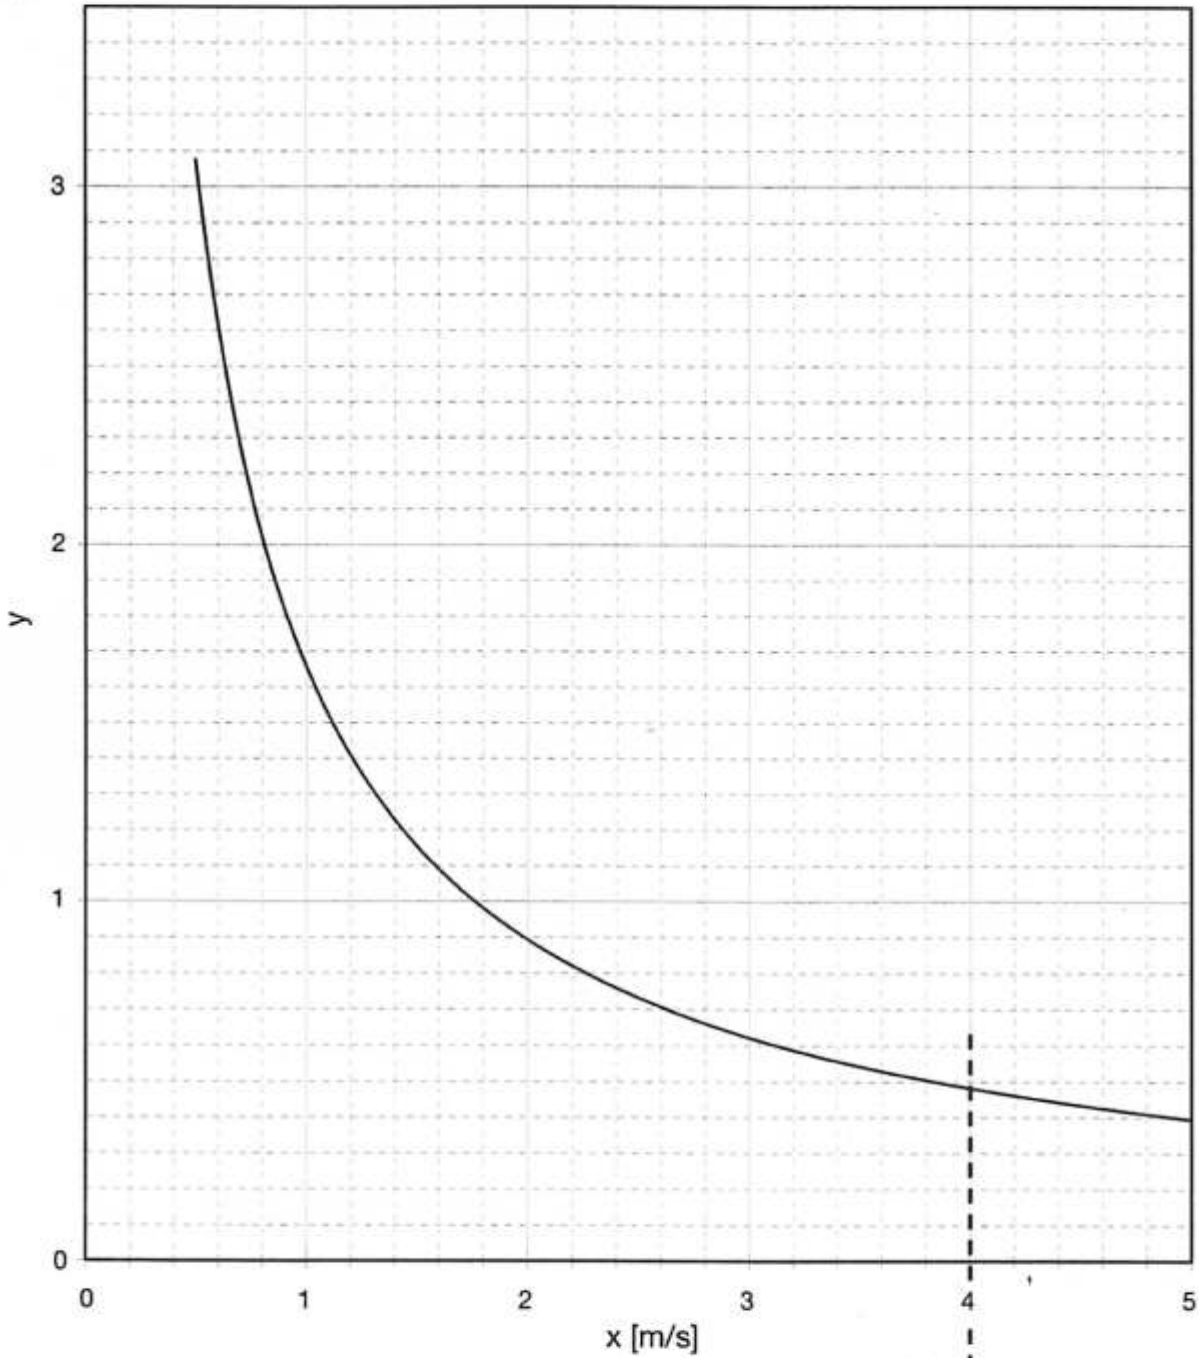

x:
y:
A:
(m / s)

A - - -